

PRODUCT NEWS 2025/26

The **SRC30/EL** is a powerful, compact safety relay that has been specially developed for the highest safety requirements in machines and elevators – reliable, versatile, and space-saving.

Sensors

Single or dual channel operation with/for:

- Emergency stop buttons
- Light curtain monitoring
- Mechanical safety switches
- Non-contact safety contacts

Features


- Feedback circuit for monitoring downstream contactors or expansion modules
- Cyclical monitoring of output contacts
- Display of switching status and mains via LED
- Automatic or manual start
- Cross-circuit and ground fault monitoring

Safety level

Suitable up to SIL3/PLe · EN ISO 13849-1 · EN IEC 62061 · EN 61508 1 · EN 81-20 · EN 81-50

Application examples

Mechanical engineering · Automation technology · Conveyor technology · Robotics · Safety monitoring in industrial environments · Elevator monitoring

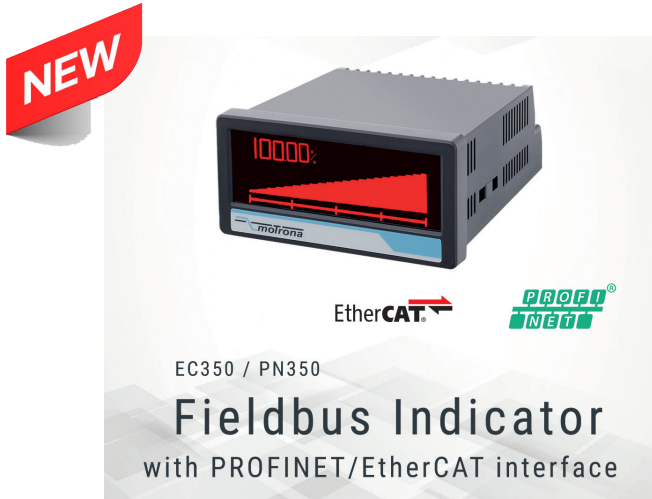

Fieldbus indicators PN350 / EC350 - efficient visualization solutions that display, calculate, and transmit process data – ideal for modern Industry 4.0 applications such as machine monitoring, process control, and condition monitoring.

- Multi-function indicator with PROFINET/EtherCAT interface
- Operating modes for displaying two process values and combinations of the two values (1+2, 1-2, 1x2, 1:2)
- Remote triggering, switching of transistor or relay outputs depending on the process values
- Conversion of fieldbus values into analog values or serial communication (Modbus RTU)
- Dual port Ethernet with integrated switch for looping into the existing company network